


Project File: MEL-0255
Melrose Towers Condominium
51 Melrose Street
Melrose, Massachusetts 02176

**OPERATION AND MAINTENANCE PLAN,
LONG-TERM POLLUTION PREVENTION PLAN
AND DRAINAGE SYSTEM INSPECTION**

Melrose Towers Condominium

Melrose, Massachusetts

Date: May 10, 2022

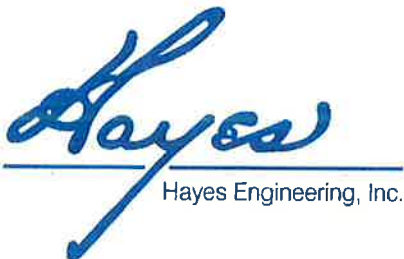

Hayes Engineering, Inc.
603 Salem Street
Wakefield, MA 01880
Tel: (781) 246-2800
Fax : (781) 246-7596

**OPERATION AND MAINTENANCE PLAN
Melrose Towers Condominium
MELROSE, MASSACHUSETTS**

May 10, 2022

GENERAL

The management plan incorporates a combination of two of structural Best Management Practices and Parking Lot Sweeping to improve the water quality of the stormwater runoff from the proposed roadway.

1. Deep Sump Catch Basin with hood
2. Original Catch Basins
3. Parking Lot Sweeping

These stormwater management facilities have unique characteristics, uses, planning considerations and maintenance requirements. It is suggested that the following guidelines be adhered to for one-year cycle, then adjusted, as necessary, based on the results of the required inspections, unless otherwise stated.

Deep Sump Catch Basin

- Deep Sump Catch Basins should be inspected and, if necessary, cleaned a minimum of one (1) time per year and at the end of foliage and snow removal seasons. If the results of these cleanings reveal that less frequent cleaning is needed, then the frequency may be adjusted but catch basins will be inspected and cleaned at least once annually.
- Sediment must be removed whenever the depth of deposits is greater than or equal to one half the depth from the bottom to the invert of the lowest pipe in the basin.
- All sediments and hydrocarbons should be properly handled and disposed, in accordance with local, state, and federal guidelines and regulations.

Original Catch Basins

- These catch basins can be cleaned with the same method as the new deep sump basin. Usually with a vacuum truck, care must be taken to ensure basin is not undermined as they are not precast concrete (concrete block), and bottom construction is unknown. Careful use of a vacuum truck is recommended.

Parking Lot Sweeping and Street Sweeping

- In order to minimize the TSS load to the deep sump catch basins and those BMPs downstream it is planned to sweep the pavement areas once per year or more frequently if conditions require. Based upon actual experience and documentation a revised schedule may be submitted but all pavement areas will be swept at least once annually.

O&M / LPPP
Melrose Towers Condominium
Melrose, MA 02176
May 10, 2022

Owner and Maintenance Responsibilities

The Property Management and Owner assumes the responsibility of on-going maintenance, as well as the long-term pollution prevention plan, unless other legally binding agreements are established with another entity. The yearly maintenance records will be forwarded to the Melrose Conservation by January 31st for the prior year's inspections.

O&M / LPPP
 Melrose Towers Condominium
 Melrose, MA 02176
 May 10, 2022

INSPECTION AND MAINTENANCE REPORT FORM
Melrose Towers Condominium
Melrose, Massachusetts

TO BE COMPLETED FOR REQUIRED INSPECTIONS AND MAINTENANCE
 AT THE FREQUENCY SPECIFIED IN THE OPERATION AND MAINTENANCE PLAN

Inspector: _____ Date: _____

Inspector's Title: _____

Days Since Last Rainfall: _____ Amount of Last Rainfall: _____

	BMP	BMP Installed at Grade? (circle one)		BMP Maintenance Required or performed? (circle one)		Corrective Action Needed And Notes
		Yes	No	Yes	No	
1	Original CB's (to be removed)	Yes	No	Yes	No	
2	Rebuilt CB's, Gas Trap, Deep Sump	Yes	No	Yes	No	
3	Original CB	Yes	No	Yes	No	
4	Original CB	Yes	No	Yes	No	
5	Original CB	Yes	No	Yes	No	
6	Original CB	Yes	No	Yes	No	
7	Original CB	Yes	No	Yes	No	
8	Original CB	Yes	No	Yes	No	
9	Original CB	Yes	No	Yes	No	
10	Original CB	Yes	No	Yes	No	

O&M / LPPP
Melrose Towers Condominium
Melrose, MA 02176
May 10, 2022

1	Gas Trap	Yes	No	Yes	No	
1	DMH	Yes	No	Yes	No	
2	DMH	Yes	No	Yes	No	
3	DMH (to be removed)	Yes	No	Yes	No	

Additional Comments:

LONG TERM POLLUTION PREVENTION PLAN
Melrose Towers Condominium
Melrose, Massachusetts

- Good housekeeping practices: Prevent or reduce pollutant runoff from the project development through the use of street sweeping, erosion control and catch basin cleaning. It should be noted that we are not seeking credit for TSS removal with street sweeping for this project.
- Provisions for storing materials and waste products inside or under cover: All materials stored on site should be stored in a neat and orderly fashion in their appropriate containers and, if possible, under a roof or other secure enclosure. Waste products should be placed in secure receptacles until they are emptied by a licensed solid waste management company in Massachusetts.
- Vehicle washing controls: The condominium owners can prevent soap, scum, and oily grit from entering the proposed drainage system by washing vehicles on the grass areas instead of the driveway or street, or by using a commercial car wash.
- Requirements for routine inspections and maintenance of stormwater BMPs: Follow the guidelines outlined in this report.
- Spill prevention and response plans:

Prevention: All materials stored on site should be stored in a neat and orderly fashion in their appropriate containers and, if possible, under a roof or other secure enclosure. Products should be kept in their original containers with the original manufacturer's label. Products should not be mixed with one another unless recommended by the manufacturer. If possible, all the products should be used up before disposing of the container. The Manufacturer's recommendations for proper use and disposal should be followed.

Response: Manufacturer's recommended methods for cleanup should be followed. Spills should be cleaned up immediately after discovery. The spill area shall be kept well ventilated, and personnel shall wear appropriate protective clothing to prevent injury from contact with a hazardous substance. Spills of toxic or hazardous material shall be reported to the appropriate State and/or local authority in accordance with local and/or State regulations.

Fertilizers: Fertilizers shall be applied in the minimum amounts recommended by the manufacturer. Once applied, fertilizers shall be worked into the soil to limit exposure to stormwater. Storage shall be stored under a roof or other secure enclosure. The contents of any partially used bags of fertilizers shall be transferred to a sealable plastic bag or bin to avoid spills.

Herbicides and Pesticides: Store herbicides and pesticides in original containers that are closed and labeled, in a secure area out of reach of children and pets. Avoid storing in

damp areas where containers may become moist or rusty. Herbicides and Pesticides should not be stored near food. Follow the label instructions strictly about where and how much to apply. Do not put herbicides and pesticides in the trash or down the drain. Use rubber gloves when handling and use an appropriate cartridge mask if using products extensively.

- Pet waste management provisions: The project is comprised of a condominium project; therefore, the responsibility lies with the individual homeowners who own pets to perform the clean up and disposal of their pet waste.
- Provisions for solid waste management: Waste products should be placed in secure receptacles until they are emptied by a licensed solid waste management company in Massachusetts.
- Snow disposal and plowing plans relative to Wetland Resource Areas: Snow disposal should be in accordance with the Bureau of Resource Protection Snow Disposal Guidelines, Guideline No. BRPG01-01 effective December 21, 2015, a copy of which is attached.
- Winter Road Salt and/or Sand Use and Storage restrictions:

Road Salt: Use and storage should be in accordance with the Bureau of Resource Protection Drinking Water Program Guidelines on Deicing Chemical (Road Salt) Storage, Guideline No. DWSG97-1 effective December 19, 1997, a copy of which is attached.

Sand: Whenever possible, use of environmentally friendly alternatives, i.e., calcium chloride and sand instead of salt for melting ice should be considered.
- List of Emergency contacts for implementing Long-Term Pollution Prevention Plan: The responsibility lies with the Condominium Association.

O&M / LPPP
Melrose Towers Condominium
Melrose, MA 02176
May 10, 2022

Effective Date: March 8, 2001

Guideline No. BRPG01-01

Applicability: Applies to all federal, state, regional and local agencies, as well as to private businesses.

Supersedes: BRP Snow Disposal Guideline BRPG97-1 issued 12/19/97, and all previous snow disposal guidance

Approved by: Glenn Haas, Assistant Commissioner for Resource Protection

PURPOSE: To provide guidelines to all government agencies and private businesses regarding snow disposal site selection, site preparation and maintenance, and emergency snow disposal options that are acceptable to the Department of Environmental Protection, Bureau of Resource Protection.

APPLICABILITY: These Guidelines are issued by the Bureau of Resource Protection on behalf of all Bureau Programs (including Drinking Water Supply, Wetlands and Waterways, Wastewater Management, and Watershed Planning and Permitting). They apply to public agencies and private businesses disposing of snow in the Commonwealth of Massachusetts.

INTRODUCTION

Finding a place to dispose of collected snow poses a challenge to municipalities and businesses as they clear roads, parking lots, bridges, and sidewalks. While we are all aware of the threats to public safety caused by snow, collected snow that is contaminated with road salt, sand, litter, and automotive pollutants such as oil also threatens public health and the environment.

As snow melts, road salt, sand, litter, and other pollutants are transported into surface water or through the soil where they may eventually reach the groundwater. Road salt and other pollutants can contaminate water supplies and are toxic to aquatic life at certain levels. Sand washed into waterbodies can create sand bars or fill in wetlands and ponds, impacting aquatic life, causing flooding, and affecting our use of these resources.

There are several steps that communities can take to minimize the impacts of snow disposal on public health and the environment. These steps will help communities avoid the costs of a contaminated water supply, degraded waterbodies, and flooding. Everything we do on the land has the potential to impact our water resources. Given the authority of local government over the use of the land, municipal officials and staff have a critically important role to play in protecting our water resources.

The purpose of these guidelines is to help municipalities and businesses select, prepare, and maintain appropriate snow disposal sites before the snow begins to accumulate through the winter.

RECOMMENDED GUIDELINES

These snow disposal guidelines address: (1) site selection; (2) site preparation and maintenance; and (3) emergency snow disposal.

1. SITE SELECTION

The key to selecting effective snow disposal sites is to locate them adjacent to or on pervious surfaces in upland areas away from water resources and wells. At these locations, the snow meltwater can filter into the soil, leaving behind sand and debris which can be removed in the springtime. The following areas should be avoided:

- Avoid dumping of snow into any waterbody, including rivers, the ocean, reservoirs, ponds, or wetlands. In addition to water quality impacts and flooding, snow disposed of in open water can cause navigational hazards when it freezes into ice blocks.
- Do not dump snow within a Zone II or Interim Wellhead Protection Area (IWPA) of a public water supply well or within 75 feet of a private well, where road salt may contaminate water supplies.
- Avoid dumping snow on MassDEP-designated high and medium-yield aquifers where it may contaminate groundwater (see the next page for information on ordering maps from MassGIS showing the locations of aquifers, Zone II's, and IWPA's in your community).
- Avoid dumping snow in sanitary landfills and gravel pits. Snow meltwater will create more contaminated leachate in landfills posing a greater risk to groundwater, and in gravel pits, there is little opportunity for pollutants to be filtered out of the meltwater because groundwater is close to the land surface.
- Avoid disposing of snow on top of storm drain catch basins or in stormwater drainage swales or ditches. Snow combined with sand and debris may block a storm drainage system, causing localized flooding. A high volume of sand, sediment, and litter released from melting snow also may be quickly transported through the system into surface water.

Site Selection Procedures

1. It is important that the municipal Department of Public Works or Highway Department, Conservation Commission, and Board of Health work together to select appropriate snow disposal sites. The following steps should be taken:
2. Estimate how much snow disposal capacity is needed for the season so that an adequate number of disposal sites can be selected and prepared.

3. Identify sites that could potentially be used for snow disposal such as municipal open space (e.g., parking lots or parks).
4. Sites located in upland locations that are not likely to impact sensitive environmental resources should be selected first.
5. If more storage space is still needed, prioritize the sites with the least environmental impact (using the site selection criteria, and local or MassGIS maps as a guide).

MassGIS Maps of Open Space and Water Resources

If local maps do not show the information you need to select appropriate snow disposal sites, you may order maps from MassGIS (Massachusetts Geographic Information System) which show publicly owned open spaces and approximate locations of sensitive environmental resources (locations should be field verified where possible). Different coverages or map themes depicting sensitive environmental resources are available from MassGIS on the map you order. At a minimum, you should order the Priority Resources Map. The Priority Resources Map includes aquifers, public water supplies, MassDEP-approved Zone II's, Interim Wellhead Protection Areas, Wetlands, Open Space, Areas of Critical Environmental Concern, NHESP Wetlands Habitats, MassDEP Permitted Solid Waste facilities, Surface Water Protection areas (Zone A's) and base map features. The cost of this map is \$25.00. Other coverages or map themes you may consider, depending on the location of your city or town, include Outstanding Resource Waters and MassDEP Eelgrass Resources. These are available at \$25.00 each, with each map theme being depicted on a separate map. Maps should be ordered from [MassGIS](#). Maps may also be ordered by fax at 617-626-1249 (order form available from the MassGIS web site) or mail. For further information, contact MassGIS at 617-626-1189.

2. SITE PREPARATION AND MAINTENANCE

In addition to carefully selecting disposal sites before the winter begins, it is important to prepare and maintain these sites to maximize their effectiveness. The following maintenance measures should be undertaken for all snow disposal sites:

- A silt fence or equivalent barrier should be placed securely on the downgradient side of the snow disposal site.
- To filter pollutants out of the meltwater, a 50-foot vegetative buffer strip should be maintained during the growth season between the disposal site and adjacent waterbodies.
- Debris should be cleared from the site prior to using the site for snow disposal.
- Debris should be cleared from the site and properly disposed of at the end of the snow season and no later than May 15.

O&M / LPPP
Melrose Towers Condominium
Melrose, MA 02176
May 10, 2022

3. EMERGENCY SNOW DISPOSAL

As mentioned earlier, it is important to estimate the amount of snow disposal capacity you will need so that an adequate number of upland disposal sites can be selected and prepared.

If despite your planning, upland disposal sites have been exhausted, snow may be disposed of near waterbodies. A vegetated buffer of at least 50 feet should still be maintained between the site and the waterbody in these situations. Furthermore, it is essential that the other guidelines for preparing and maintaining snow disposal sites be followed to minimize the threat to adjacent waterbodies.

Under extraordinary conditions, when all land-based snow disposal options are exhausted, disposal of snow that is not obviously contaminated with road salt, sand, and other pollutants may be allowed in certain waterbodies under certain conditions. In these dire situations, notify your Conservation Commission and the appropriate MassDEP Regional Service Center before disposing of snow in a waterbody.

Use the following guidelines in these emergency situations:

- Dispose of snow in open water with adequate flow and mixing to prevent ice dams from forming.
- Do not dispose of snow in saltmarshes, vegetated wetlands, certified vernal pools, shellfish beds, mudflats, drinking water reservoirs and their tributaries, Zone IIs or IWPA's of public water supply wells, Outstanding Resource Waters, or Areas of Critical Environmental Concern.
- Do not dispose of snow where trucks may cause shoreline damage or erosion.
- Consult with the municipal Conservation Commission to ensure that snow disposal in open water complies with local ordinances and bylaws.

FOR MORE INFORMATION

If you need more information, contact one of MassDEP's Regional Service Centers:

Northeast Regional Office, Wilmington, 978-694-3200
Southeast Regional Office, Lakeville, 508-946-2714
Central Regional Office, Worcester, 508-792-7683
Western Regional Office, Springfield, 413-755-2214

or

Call Thomas Maguire of DEP's Bureau of Resource Protection in Boston at 617-292-5602.

O&M / LPPP
Melrose Towers Condominium
Melrose, MA 02176
May 10, 2022

Effective Date: December 19, 1997

Guideline No. DWSG97-1

Applicability: Applies to all parties storing road salt or other chemical deicing agents.

Supersedes: Fact Sheet: DEICING CHEMICAL (ROAD SALT) STORAGE (January 1996)

Approved by: Arleen O'Donnell, Asst. Commissioner for Resource Protection

PURPOSE: To summarize salt storage prohibition standards around drinking water supplies and current salt storage practices.

APPLICABILITY: These guidelines are issued on behalf of the Bureau of Resource Protection's Drinking Water Program. They apply to all parties storing road salt or other chemical deicing agents.

I. The Road Salt Problem:

Historically, there have been incidents in Massachusetts where improperly stored road salt has polluted public and private drinking water supplies. Recognizing the problem, state and local governments have taken steps in recent years to remediate impacted water supplies and to protect water supplies from future contamination. As a result of properly designing storage sheds, new incidents are uncommon. These guidelines summarize salt storage prohibition standards around drinking water supplies and current salt storage practices.

II. Salt Pile Restrictions in Water Supply Protection Areas:

Uncovered storage of salt is forbidden by Massachusetts General Law Chapter 85, section 7A in areas that would threaten water supplies. The Drinking Water Regulations, 310 CMR 22.21(2) (b), also restrict deicing chemical storage within wellhead protection areas (Zone I and Zone II) for public water supply wells, as follows: "storage of sodium chloride, chemically treated abrasives or other chemicals used for the removal of ice and snow on roads [are prohibited], unless such storage is within a structure designed to prevent the generation and escape of contaminated runoff or leachate." For drinking water reservoirs, 310 CMR 22.20C prohibits, through local bylaw, uncovered or uncontained storage of road or parking lot de-icing and sanding materials within Zone A at new reservoirs and at those reservoirs increasing their withdrawals under MGL Chapter 21G, the Water Management Act.

For people on a low-sodium diet, 20 mg/L of sodium in drinking water is consistent with the bottled water regulations' meaning of "sodium free." At 20 mg/L, sodium contributes 10% or less to the sodium level in people on a sodium-restricted diet. For more information contact: Catherine Sarafinas at 617-556-1070 or catherine.sarafinas@state.ma.us, or Suzanne Robert at 617-292-5620 or suzanne.robert@state.ma.us.

O&M / LPPP
Melrose Towers Condominium
Melrose, MA 02176
May 10, 2022

III. Salt Storage Best Management Practices (BMP):

Components of an "environment-friendly" roadway deicing salt storage facility include:

- the right site = a flat site;
- adequate space for salt piles;
- storage on a pad (impervious/paved area);
- storage under a roof; and
- runoff collection/containment.

For more information, see The Salt Storage Handbook, 6th ed. Virginia: Salt Institute, 2006 (phone 703-549-4648 or <http://www.saltinstitute.org/publication/safe-and-sustainable-snowfighting/>).

IV. Salt Storage Practices of the Massachusetts Highway Department:

The Massachusetts Highway Department (MHD) has 216 permanent salt storage sheds at 109 locations in the state. On leased land and state land under arteries and ramps, where the MHD cannot build sheds, salt piles are stored under impermeable material. This accounts for an additional 15 sites. The MHD also administers a program to assist municipalities with the construction of salt storage sheds. Of 351 communities, 201 municipalities have used state funds for salt storage facilities.

For more information about MHD's salt storage facilities, contact Paul Brown at the Massachusetts Highway Department, 10 Park Plaza, Boston, MA 02116 (phone 617-973-7792).

DRAINAGE INSPECTION
Melrose Towers Condominium
Melrose Street
Melrose, Massachusetts
Date: May 10, 2022

As part of the current application to repave the Melrose Towers Condominium parking lots, Hayes Engineering, Inc. conducted an inspection of the existing drainage system in the complex. The purpose of the inspection was to determine the condition of the drainage system and ascertain as to whether or not some remedial action is necessary before paving is conducted. The current schedule calls for scarifying, removing surplus material, and repaving in the first 2 weeks of July. This schedule is largely dictated by the availability of alternative parking for the condominium complex in the Melrose school parking lots across the street from the condominium.

Deficiencies

While numerous deficiencies were found in the drainage system by current day standards, one issue as follows stands out as needing attention prior to the paving project.

Part of the complex consists of a parking garage and, as such, floor drains are required to be connected to the sewer system with a gas trap. When originally constructed, apparently the garage was connected to the trunk sewer with a properly vented gas trap. At some point subsequent to that, an illegal drainage connection was created by adding a catch basin to drain the parking lot on the gas trapped sewer line. That connection was discontinued upon its discovery leaving the floor drain of the garage to up flow in the incorrectly constructed catch basin. In order to remedy this situation, it is proposed to construct a new drain line for the low point at building 53, and piping it to the on-site drainage. The floor drain connection to the sanitary sewer will then be restored.

O&M / LPPP
Melrose Towers Condominium
Melrose, MA 02176
May 10, 2022

Proposed Construction

The proposed construction prior to paving is as shown on Site Plan in Melrose, MA, 53 Melrose Street, Dated: May 9, 2022, by Hayes Engineering, Inc., Scale 1"= 20'. It is anticipated that a contract for this work will be negotiated through the paving contractor to ensure its completion prior to the commencement of pavement replacement in early July. That plan accompanies this report.

Catch basin cleaning

After the paving contract is completed, it is proposed to clean all the catch basin sumps and inventory the necessary work both to repair and improve the stormwater system. The condominium association will then establish a timeline and priority for further drainage system improvements.



CB1




CB11411



CB1 [GAS TRAP PIPE]



CB2

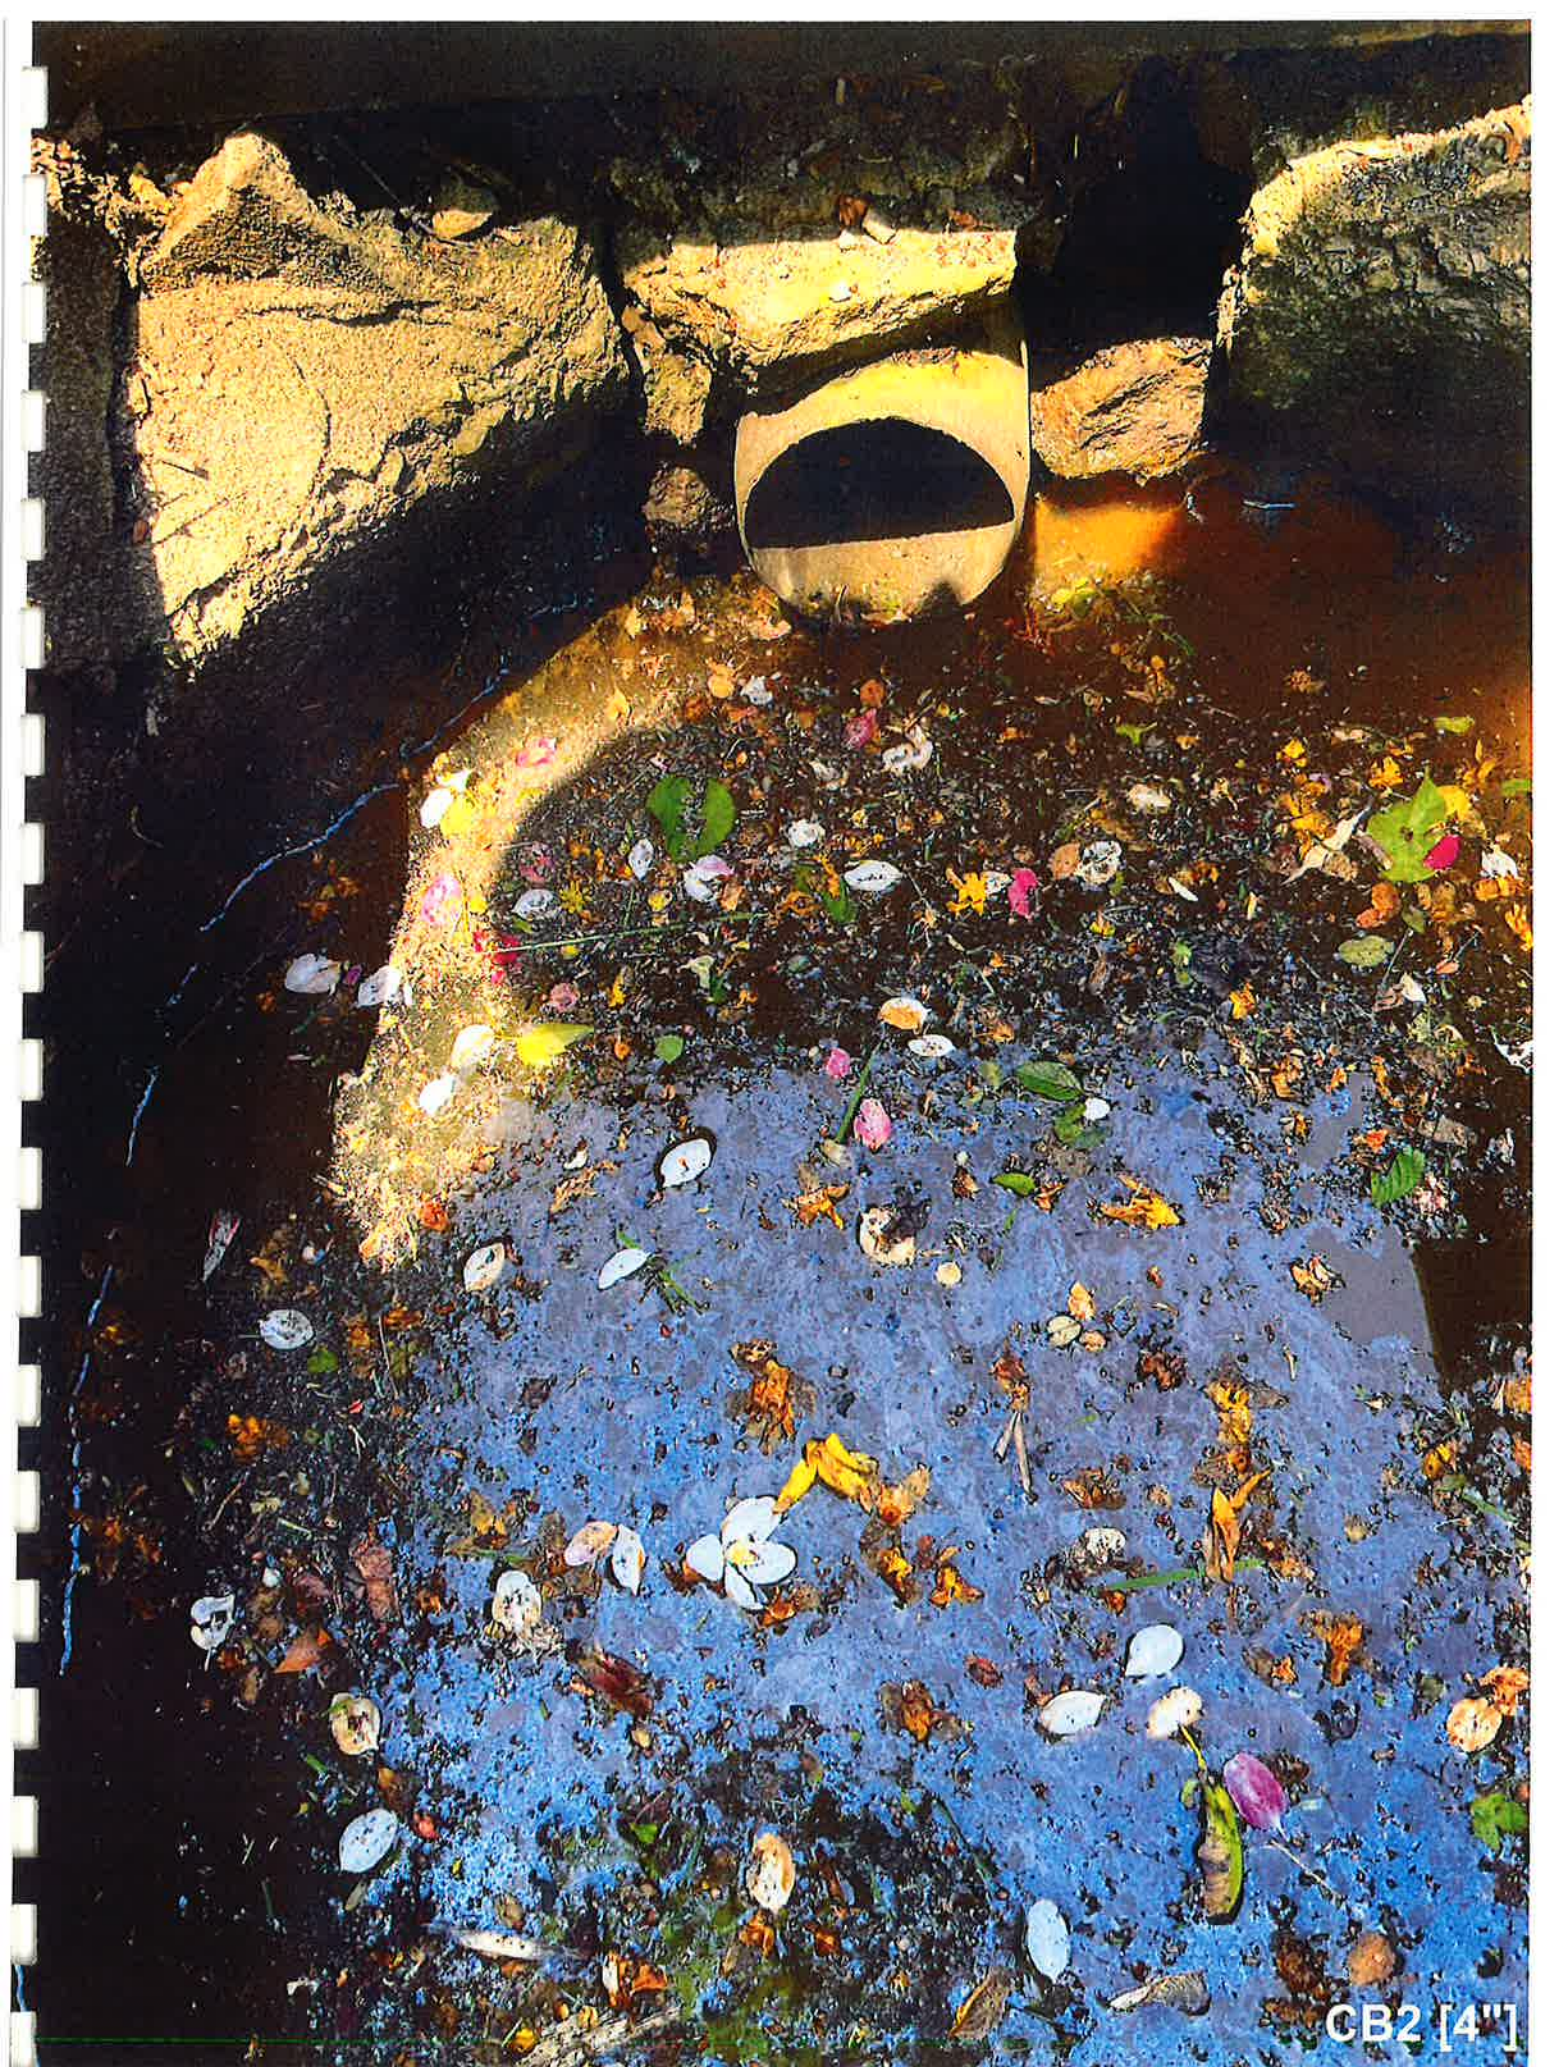

CB2 [4"]



CB2 [8"]



CB2 [PROP INLET]





CB4



CB5



CB5 [12"]



CB6



CB6 [12"]



CB7



CB8



CB9



DMH1



DMH1 [3'x5']



DMH1 [36"]



GAS TRAP OUTLET



GAS TRAP OUTLET



GAS TRAP



GAS TRAP VENT FLOOR